



LIGHTING • FIRE & CO DETECTION



MAINS STROBE LIGHT




FEATURES

- Fire alarm Visual Indicator Device (VID)
- Connects directly into a Hispec fire alarm system via the WHITE low voltage interconnect cable
- Ideal for general signalling
- Designed to give a visual warning if a Hispec alarm system has been triggered
- BESA box mountable
- Red flashing LEDs

TECHNICAL INFORMATION

Power Source: 110-240V AC Power

IP Rating: IP20 out the box.
IPX5 when mounted on a BESA box with an appropriate gasket

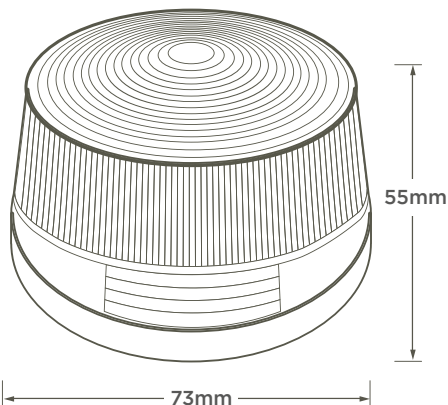

Product Code: HSSA/STROBE



RoHS
Compliant



hispec.co.uk

