

Safe-D Conduit Clip 20 + 25



Provides a 3mm stand off from the surface



Simply wrap around the conduit, perfect for tight spaces



Secure conduit with locking tab




Centralised base fixing, gives a neat appearance to installation

Safe-D Conduit Clips combine fire performance, quickest fix, and a modern look, to secure cables in 20mm & 25mm outer diameter PVC and galvanised conduit installations... or exposed 20mm or 25mm o/d cables and pipes.

Compared to traditional saddles, where lids must be secured to bases, there is no separate lid - the conduit (and cables) is held by the wrap-design, which has an end tab that simply fits through the opposing notch to enable a secure lock.

The tight wrap, that eliminates need for wide-bases, is ideal also for installations in tight spaces.

1 piece for only 1 fixing!

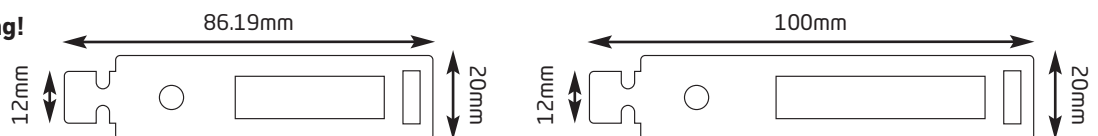

- Fully safety tested and certified to BS5839 part 1 compliant
- >1200°C melting point
- Non-corrosive finish
- Unique single piece fixing, only 1x screw required
- Fixing hole is ideal for use with D-Line D-Fixings
- Available in white, black or galvanised finish

Code	Description
SAFE-DCOND20	(L) 86.19mm x (W) 20mm x (H) 23mm (folded - max height) 5.7mm diameter pre-drilled hole in base
SAFE-DCOND20W	(L) 86.19mm x (W) 20mm x (H) 23mm (folded - max height) 5.7mm diameter pre-drilled hole in base
SAFE-DCOND20B	(L) 86.19mm x (W) 20mm x (H) 23mm (folded - max height) 5.7mm diameter pre-drilled hole in base
SAFE-DCOND25	(L) 100mm x (W) 20mm x (H) 28mm (folded - max height) 5.7mm diameter pre-drilled hole in base
SAFE-DCOND25W	(L) 100mm x (W) 20mm x (H) 28mm (folded - max height) 5.7mm diameter pre-drilled hole in base
SAFE-DCOND25B	(L) 100mm x (W) 20mm x (H) 28mm (folded - max height) 5.7mm diameter pre-drilled hole in base