


Product Code: CU3RCD25B

Description: 2 Pole 25A 30mA RCCB - Bi-directional

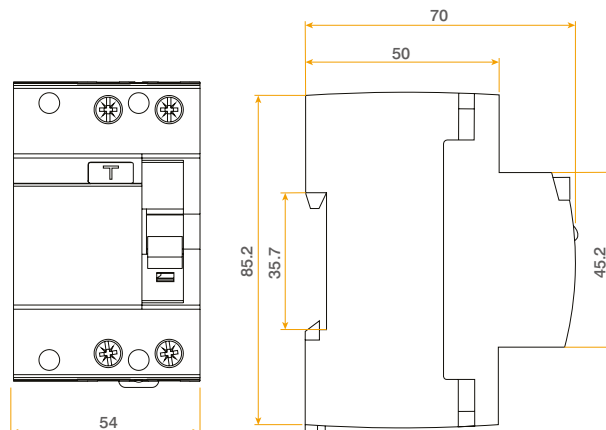

General Information

Dimensions (mm)	54 (W) x 85.2 (H) x 73 (D)
Colour	Light Grey
Rated Operational Voltage (AC) (Ue)	230
Frequency (Hz)	50/60
Maximum Rated Current (A) (In)	25
Impulse Withstand Voltage (Uimp)	4000
Type	B
Rated Making & Breaking Capacity (A) (Im)	500
Tripping Current (mA) (in)	30
Residual Non-Operating Current (IΔn)	0.5
Endurance Operations	2000 'ON' & 1000 'OFF' Cycles
Trip Type	Electro-Magnetic Release
Bi-directional	Yes
Device Terminals	Screwed Lug & Pin
RCD Terminal Capacity (mm ²)	35
Number Of Poles	2 (1+N)
Ingress Protection	IP20
Operational Temperature (°C)	-25 to +40
Warranty (Years)	3
Standards	BS EN 61008-1
RCD Terminal Torque (Nm)	2.5

Additional Information For cleaning / polishing of products, use only a soft, dry, clean cloth.

Compatible Accessories TPRCDLINK:Three phase RCD Link Kit

