



NON DIMMABLE SLIMLINE DRIVERS

CONSTANT VOLTAGE 12V/24V IP67




Features

- Indoor & Outdoor Application
- Working Temperature Range -25°C ~ +50°C
- Have OCP,OVP,SCP protection function
- CE, ROHS & UKCA approved
- 3 years warranty
- Regulated Output (Prolongs Led Life)
- Triple Safety Cutouts

Product Code	Output Voltage	Wattage	Input Voltage	Output Current	Power Factor	IP Rating	Dimensions
12V15IP67	12VDC CV	15W	200- 240Vac 50/60HZ	1.25A	Pf>0.95	IP67	L118 x W35 x H25
12V30IP67		30W		2.5A			L218 x W30 x H21
12V45IP67		45W		3.75A			L218 x W30 x H21
12V60IP67		60W		5A			L218 x W30 x H21
12V100IP67		100W		8.33A			L247 x W30 x H21
12V150IP67		150W		12.5A			L263 x W40 x H23
24V15IP67	24VDC CV	15W	200- 240Vac 50/60HZ	0.62A	Pf>0.95	IP67	L118 x W35 x H25
24V30IP67		30W		1.25A			L218 x W30 x H21
24V50IP67		50W		2.08A			L205 x W45 x H30

24V60IP67		60W		2.5A			L157 x W66 x H55
24V100IP67		100W		4.16A			L198 x W60 x H37
24V150IP67		150W		6.25A			L228 x W60 x H38

Drawing (example):

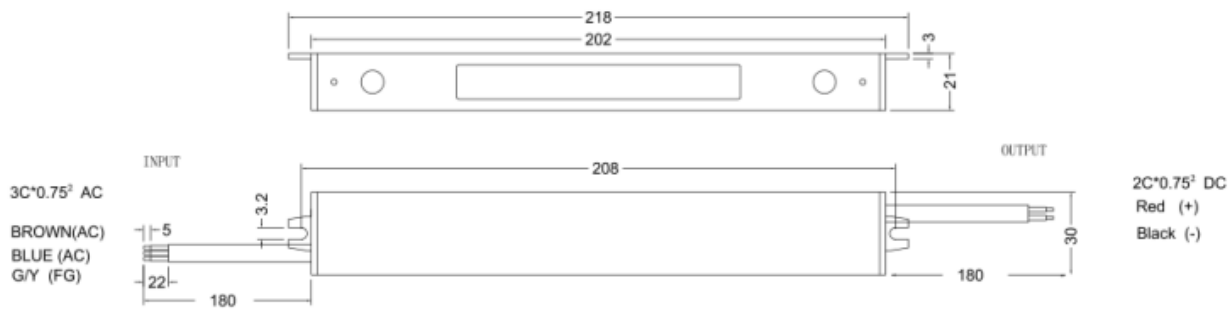


Installation and wiring Instructions:

- To be installed by a certified electrician.
- Ensure all contact points are connected firmly.
- Screws for fixing.
- The following instructions should be read carefully before commencing installation.
- Failure to implement procedure below will invalidate the warranty.
- Please conduct regular check and maintenance to eliminate safety risks.

General Notes:

- Please ensure that the ground wire is properly grounded and ensure it does not come into contact with the neutral wire.
- Please make the power supply installed in a well ventilated place, to ensure that the environment temperature is appropriate.
- Do not overload the power supply with multiple appliances.
- Please do not touch the metal shell surface to avoid high temperature scald.
- Do not attempt to repair privately. Please contact the supplier if you have any questions.

Wiring Diagram:

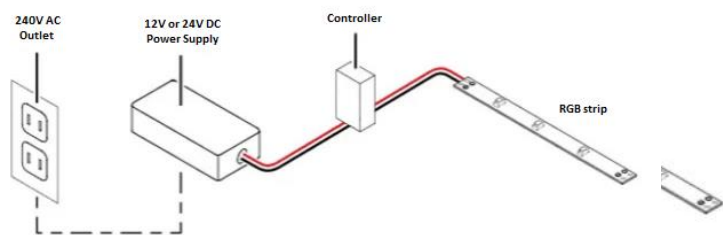

Individual					Outer Carton	
Product Code	Bar Code	Qty / Carton	Weight	Dimensions (mm) L x W x H	Weight	Dimensions (cm) L x W x H
12V15IP67	5060306472500	100pcs	178g	130 x 50 x 30	18.5kg	32 x 28 x 27
12V30IP67	5060271810529	50pcs	250g	220 x 30 x 35	13kg	33 x 24 x 19
12V45IP67	5060306470391	50pcs	250g	220 x 30 x 35	13kg	33 x 24 x 19
12V60IP67	5060306474214	50pcs	250g	220 x 30 x 35	13kg	33 x 24 x 19
12V100IP67	5060306470308	50pcs	293g	270 x 33 x 30	15kg	33 x 28 x 19
12V150IP67	5060271813049	40pcs	441g	270 x 45 x 30	18kg	33 x 28 x 19

24V15IP67	5060306474283	100pcs	178g	130 x 50 x 30	18.5kg	32 x 28 x 27
24V30IP67	5060271810062	50pcs	250g	220 x 30 x 35	13kg	33 x 24 x 19
24V50IP67	5060306474290	40pcs	526g	220 x 60 x 35	21.4kg	37 x 26 x 24
24V60IP67	5060271810550	20pcs	682g	185 x 80 x 60	13.9kg	42x19.5x26.5
24V100IP67	5060306470933	30pcs	740g	21 x 80 x 40	22kg	42 x 26 x 23
24V150IP67	5060306470308	40pcs	915g	250 x 80 x 40	21.4	37 x 24 x 26

Deltech UK Ltd: Unit 5 Mill Hill Industrial Estate, Flower Lane, Mill Hill, London NW7 2HU
Tel: 020 8906 2099 Fax: 020 8906 8383 Email: sales@deltechuk.com