


Product Code: ES1REM

Description: RF-Link Remote Controller

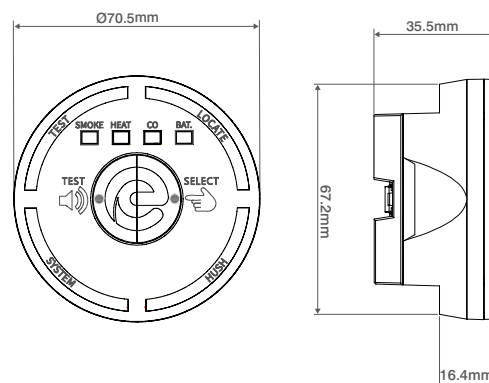

### General Information

Dimensions (mm)	Ø70 x 35.5
Colour	White
Materials	UL94-V0 rated UV stabilised ABS
Mounting	Wall or Desk
Operation	4 Buttons; Test, Select, Mode & Code
Indication	8 LEDs; 4 x Squares: smoke, heat, CO & low-battery 4 x Curved outer segments: locate alarm, hush alarm, system memory & test alarm
Manual Test Button	Activates RF-Link interconnected Espire alarms test facility's
Weight (Kg)	0.075
Warranty (Years)	5

### Supply, Power & Backup

Supply Type	Battery Powered
Operating Voltage (V DC)	3
Battery Backup	Non-replaceable 10 Year Battery
Battery Type	3V Lithium
Battery Size	CR17450
Battery Chemistry	Lithium
Battery Lifetime	10 Year

### Interconnectability

Wired Interconnect Supported	No
RF-LINK Supported	Built-in
RF-LINK Frequency (MHz)	868.3
RF-LINK Range (Open Field)(m)	100
Maximum Supported Wired & RF-LINK Interconnected Devices	28

### Environment

Operating Temperature (°C)	0 to +40
Relative Humidity Resistance (%)	95 (non-condensing)

**Compatible Products** RF-Link supported Espire Products

**Additional Information** Please note, the ES1REM should be programmed as the 'primary' device in an RF-Link system of Espire alarms.

### Features

Provides alerts and system functions controls  
Compatible with RF-Link enabled Espire alarms