


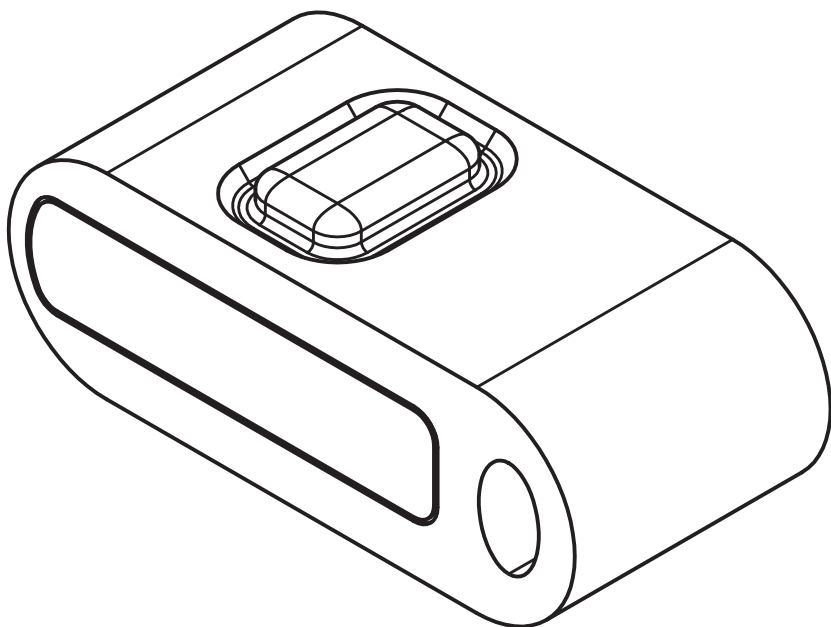


User Manual


for Kinetic Fob Switch

CUL 40037


A. What is in the box ?



x 1




x 1



x 1

B. Specifications

Dimensions:

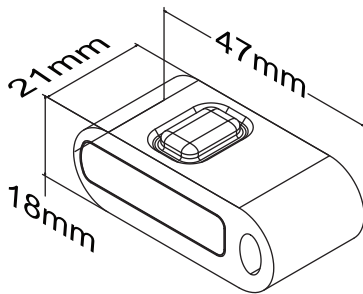

Product Code:

KS02-1G-WH

Power Source:

Self-Powered (Kinetic)

Radio Frequency:

433 MHz

Switching Type:

Push Switch

Body Material:

Silicone

Dimming Type:

N / A

IP Rating:

IP65

Transmission Range:

Outdoor 40m (no barrier)

Indoor 15m (plaster board; drywall)

Indoor 8m (concret, glass walls)




CE RoHS




C. Pairing

1. For RF Pairing

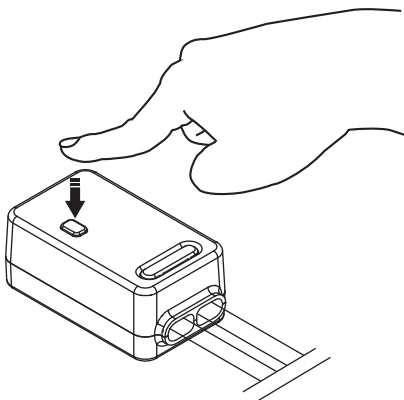

Press the Pairing Key for 3-4s,
untill the RED indicator flash slowly.

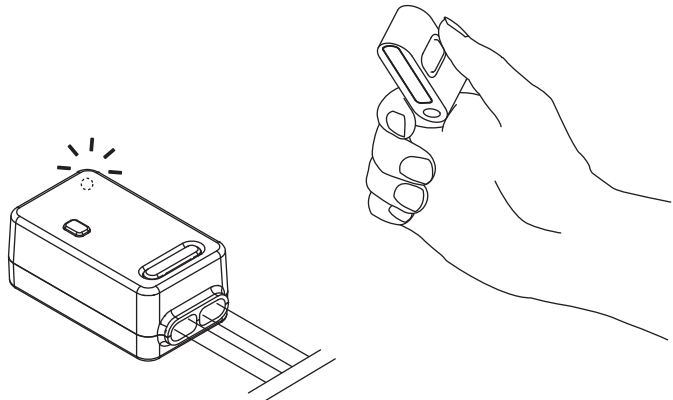

While the indicator on receiver flashes, press the
Kinetic Fob switch ONCE to complete the pairing.



Order Controllers (On/Off) separately.