


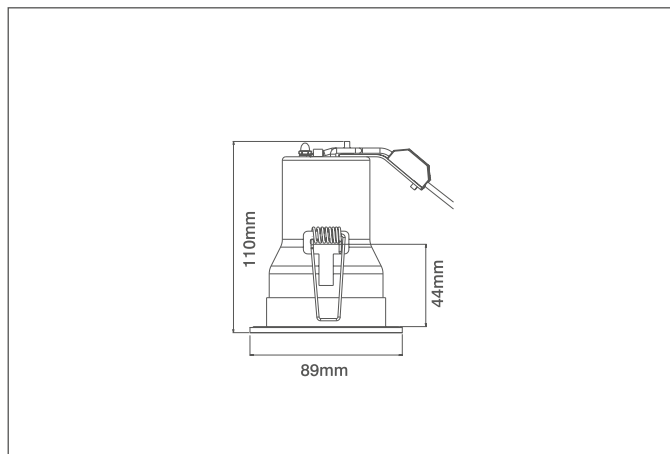

General Information

Dimensions (mm)	89 (Dia.) x 110 (D)
Materials	Housing: Powder Coated Steel
Product Weight (Kg)	0.34
Cutout Diameter (mm)	70
Recess Depth (mm)	105
Ingress Protection	IP65
Airflow (BS 5250)	0m ³ /h m ² at a pressure difference of 2 Pa
Maximum Ceiling Thickness (mm)	40
Warranty (Years)	5

Supply & Power Information

Continuous Operating Voltage (AC) (Hz)	220-240
Safety Class	I
Maximum Lamp Rating (W)	50
Lampholder Type	GU10
Recommended Overall Lamp Length (mm)	54
Suitable Lamp Types	LED & Halogen
Output Information	See information supplied with lamp being installed
Prewired Flow™ Connector	3 Pole CT105-F Push-fit Terminals

Dimming Information

Dimmable	Lamp Dependant
----------	----------------

Compatible Accessories

OVGF495WH - Cast IP65 Bezel - White
OVGF495CH - Cast IP65 Bezel - Chrome
OVGF495SC - Cast IP65 Bezel - Satin Chrome

Additional Approvals

Fire Rating	30 Minutes: 'I' Joists, Metal Web and Solid Timber Joists 60 Minutes: 'I' Joists, Metal Web and Solid Timber Joists 90 Minutes: Solid Timber Joists
Acoustic Rating	0dB (zero impact on sound insulation)
Air Flow	BS 5250: 2011 compliant

