



Product Code: CU1AFDD20B

Description: 1 Pole True 6kA B Curve 20A AFDD & RCBO 30mA

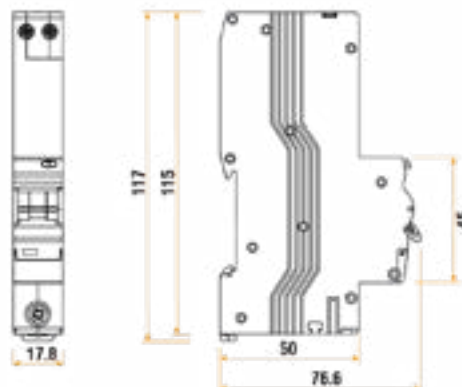

General Information

Dimensions (mm)	17.8 (W) x 118 (H) x 76.6 (D)
Finish	Light Grey (RAL 7035)
Frequency (Hz)	50/60
Maximum Rated Current (A) (In)	20
Rated Breaking Capacity (True kA) (Ics)	6
Impulse Withstand Voltage (Uimp)	4000
Endurance Mechanical Operations	6000
Endurance Electrical Operations	4000
Type	A
Trip Curve	B
Rated Making & Breaking Capacity (A) (Im)	500
Tripping Current (mA) (In)	30
Residual Non-Operating Current (IΔn)	0.03
Trip Type	Ground Fault: Electronic Over Current: Thermal/Magnetic
Device Terminals	Screwed Lug & Pin
Number Of Poles	1P + Switched Neutral
Input Terminal Capacity - Flexible (mm²)	25
Input Terminal Capacity - Rigid (mm²)	32
Input Terminal Torque (Nm)	2
Output Terminal Capacity - Flexible (mm²)	16
Output Terminal Capacity - Rigid (mm²)	25
Output Terminal Torque (Nm)	1.2
Circuit Protection	AFDD: Series Arc Fault, Parallel Arc Fault, Over Voltage Fault, Self-Test Fault, No fault RCBO: Earth fault, overcurrent & short-circuit
Neutral Tail Length (mm)	450
Ingress Protection	IP20
Operational Temperature (°C)	-25 to +40
Warranty (Years)	3

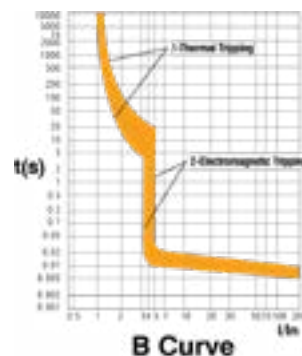

Standards BS EN 61009-1, BS EN 62606

Additional Information For cleaning / polishing of products, use only a soft, dry, clean cloth.

Condition	Repeats For 25 Seconds	After 25 Seconds
Series Arc Fault	 1.5s	See Fault Finding Guide 
Parallel Arc Fault	 1.5s	
Over Voltage Fault	 1.5s	
Self-Test Fault		See Self-Test overview
No Fault		