


**Product Code:** GUEB580RCD3

**Description:** 5 Way Mini Metal Unit (Garage) with 80A RCD (3 Free Ways)

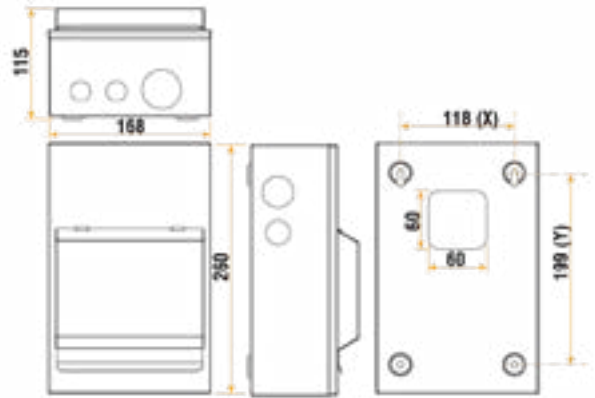

## General Information

Dimensions With Door (mm)	168 (W) x 260 (H) x 115 (D)	
Enclosure Dimensions (mm)	168 (W) x 260 (H) x 92 (D)	
Finish	White (RAL 9003)	
Materials	Enclosure & Cover: Powder Coated Steel	DIN Rail: Galvanised Steel
Frequency (Hz)	50/60	
Maximum Rated Current (A) (In)	80	
Free Ways	3	
Total Ways	5	
Device Terminals	Screwed Lug & Pin	
RCD Installed	1 x 80A 30mA RCD (CU2RCD80A)	
RCD Terminal Capacity (mm <sup>2</sup> )	25	RCD Terminal Torque (Nm) 2.5
Blanks Supplied	1 (Product Code: CU1BLANK)	
E&N Terminals	Screw	
E&N Bars Capacity (mm <sup>2</sup> )	16	E&N Bars Torque (Nm) 2
Tail Clamp Capacity (mm <sup>2</sup> )	25	Tail Clamp Torque (Nm) 1.5
Enclosure Side Knockouts (Ømm)	1 x 25 & 1 x 32	
Enclosure Top Knockouts (Ømm)	2 x 20 & 1 x 40	
Enclosure Bottom Knockouts (Ømm)	2 x 20 & 1 x 40	
Enclosure Rear Knockouts (mm)	60 x 60	
Impact Rating	IK05	
Ingress Protection	IP20	
Maximum Humidity (%)	95	
Storage Temperature (°C)	-40 to +75	
Operational Temperature (°C)	-5 to +40	
Warranty (Years)	10	Warranty - Devices (Years) 3

**Standards** BS EN 61439-3, BS EN 61008-1

## Additional Information

For cleaning / polishing of products, use only a soft, dry, clean cloth.  
 Elucian metal consumer units allow compliance with BS 7671 Wiring Regulations