



Technical Data

Weatherproof Time Controlled 13A Socket


Brief product description:

IP rated accessories designed to protect against ingress from water jets and dust, with durable seals that maintain integrity and a robust polycarbonate housing for high impact resistance which will not crack or fade, ensuring longevity of life.

Features:


- IP66 rated when in use
- 24 hour mechanical timer, 1 segment = 15 minutes. With override switch and LED power indicator
- Cover will stay open to allow for easy access to sockets
- Bright LED power indicator visible through see-through cover
- Fast fix - no separate screws, no screw covers, 150° rotation
- Patented cable entry - prevents accidental opening of cover by pulling of connected cable
- Large open/closer paddles for easier operation, flush fit to prevent accidental damage
- Multiple gland entry positions: 8 versatile entry options with M25 capability with an easy push out blank plug design. 1 drill out entry 20/25mm in rear face

Product Images

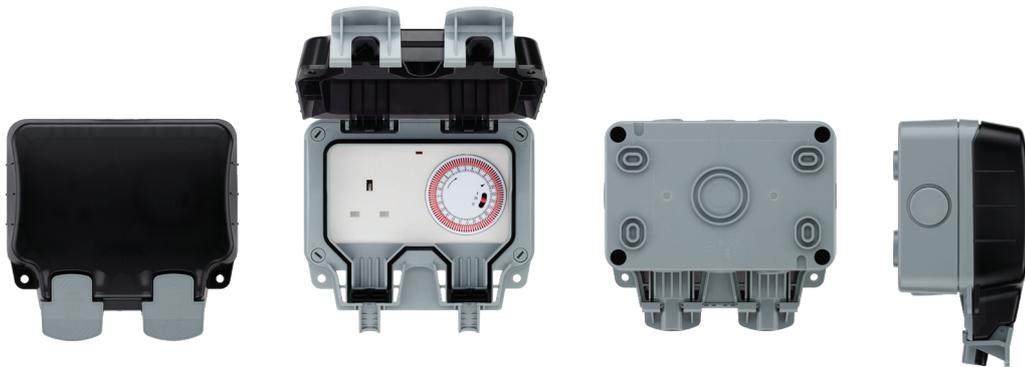

WP23TM24

Line Diagrams

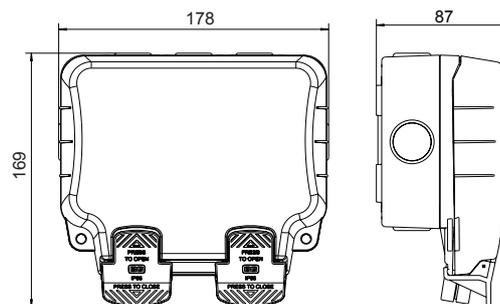

WP23TM24



Weatherproof Time Controlled 13A Socket

Technical Specifications

Rating	3,120 Watts Max, 13 Amp 250V	
Standard(s)	BS 1363-2:2016+A1:2018	
Terminal Capacity	3 x 2.5mm ² , 3 x 4.0mm ² & 2 x 6.0mm ²	
IP Rating	IP66	
RoHS Directive	Yes	
WEEE Directive	Yes	
Number of cable entries	8 x 20mm. 1 in each of the 2 sides and 3 in each of the top and bottom faces 1 drill out entry 20/25mm in rear face	

Packaging Information

Cat No.	Description	Packaging Type			Pack Quantity			Barcode		
		Product	Inner Box	Outer Box	Each	Inner Box	Outer Box	Individual	Inner Box	Outer Box
WP23TM24	Time Controlled 13A Socket	Printed Box	Box	Carton	1	/	10	5050765044783	/	5050765044974

Weights & Dimensions

Cat No.	Description	Dimensions (H x W x D) cm			Weight (kg)			CBM (m ³)
		Unpacked Product	Packed Product	Outer Box	Unpacked Product	Packed Product	Outer Box	Outer Box
WP23TM24	Time Controlled 13A Socket	16.9 x 17.8 x 8.7	19.7 x 18.2 x 9.7	19.6 x 38.3 x 49.8	0.60	0.70	7.46	0.03738