


Product Code: VPSC425BK

Luckinslive 389116178

Description: 10AX Ingot 1 Gang Intermediate Plate Switch

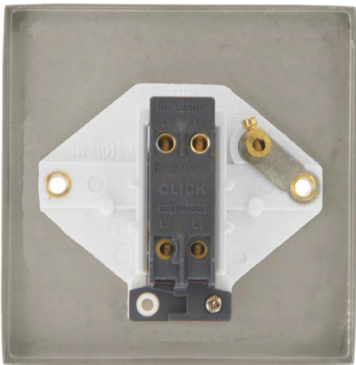

General Information

Plate Dimensions (mm)	88 (W) x 88 (H) x 8 (D)	
Dimensions With Gasket (mm)	91 (W) x 91 (H) x 9 (D)	
Plate Fixing Centres - Horizontal (mm)	60.3	
MiniGrid Plate (Gang)	1	
MiniGrid Single Width Module Quantity	1	
MiniGrid Double Width Module Quantity	0	
Style	Victorian	
Finish	Satin Chrome	
Insert Colour	Black	
Gasket Colour	Black	
Materials	Front Plate: Stainless Steel Switch Cover: Stainless Steel Terminals: Brass Contacts: Silver "on-lay" Copper / Brass Earth Strap: Mild Steel	Insert: Urea Rear Housing: Nylon Terminal Screws: Steel & Yellow Passivated Internal Busbars: Formed Pressed Brass Gasket: Nylon
Anti Microbial Certified	No	
Operating Voltage (AC)	250	Frequency (Hz) 50
Inductive Load Rating (AX)	10	
Load Rating Comments	Suitable for Fluorescent or Inductive Loads	
Termination Type	Screw	
Terminal Size (mm)	Ø3.5	Terminal Torque Value (Nm) 0.5
Terminal Capacity - Solid (mm²)	4 x 1.5 or 2 x 2.5	
Modular Rocker Switches	Yes	
Intermediate Switch	Yes	
Minimum Back Box Depth (mm)	16	
Ingress Protection	IP20	
Operational Temperature (°C)	-5 to +40	
Warranty (Years)	20	

Standards BS EN 60669-1

Additional Information

For cleaning / polishing of products, use only a soft, dry, clean cloth.
Ensure that the mains supply is isolated before commencing installation and refer to the circuit diagram with the relevant product.
Bare earth cables must always be covered with appropriate sleeving and wired to the earth terminal.

Interchangeable with modules in the MiniGrid Range.

UK Design Registration: 3015621

Scolmore House, Mariner, Lichfield Road Industrial Estate,
Tamworth, Staffordshire, B79 7UL United Kingdom
T: +44 (0)1827 63454 | F: +44 (0)1827 63362
E: sales@scolmore.com | W: scolmore.com



Catalogue



Range



DoC



Installation

